


S12R-Y4MPTAW-3

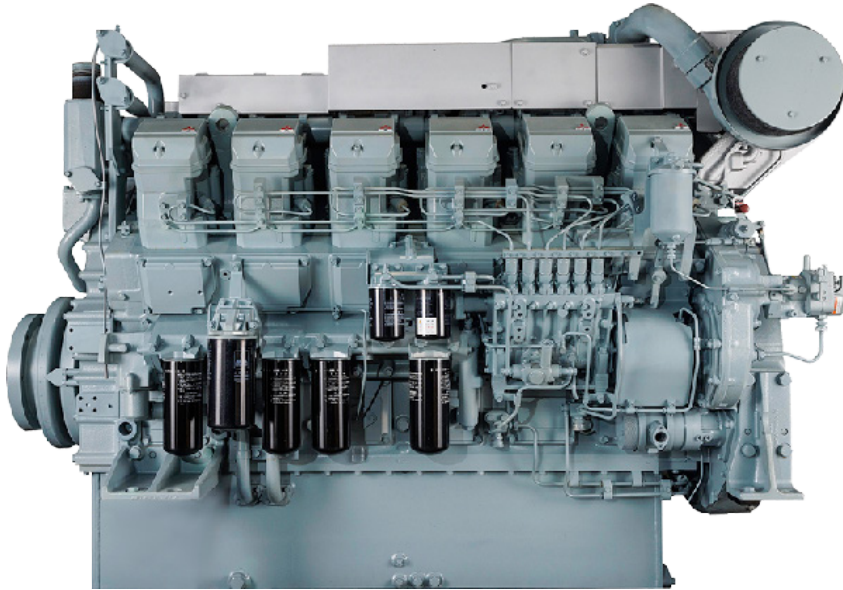

12-cylinder, 4-cycle, mechanical controlled, water cooled, turbocharged, direct injection diesel engine

BORE/STROKE 6.7in x 7.1in
(170mm x 180mm)


DISPLACEMENT 49L
(2,992 cu in)

DIMENSIONS 93.5in (2,376mm) length
60in (1,512mm) width
68.1in (1,731mm) height

WEIGHT (DRY) 11,795lbs (5,350kg)

The S12R engine is designed for durability, reliability, and efficiency.

Laborde Products is a proud distributor for Mitsubishi Marine Engines and is happy to provide the marine markets with a simple and fully mechanical engine. These engines were constructed with superior engineering to maintain the mechanical nature of its design and a commitment to keeping the power in the US mariners' hands, not the computers.

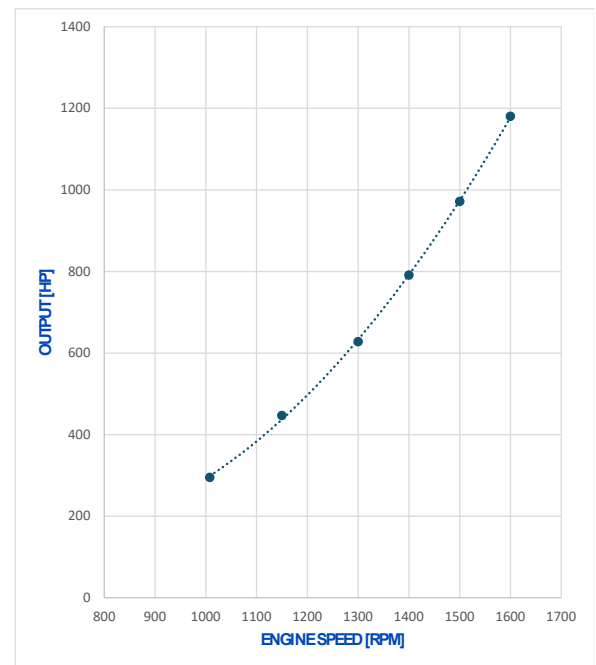

Load	Speed [rpm]	Output [hp]	Torque [lb.ft]	Fuel Consumption [gal/h]
100%	1600	1260	4138	63
83%	1500	1041	3646	50
67%	1400	848	3181	40
53%	1300	671	2709	31
43%	1200	536	2348	25
34%	1100	423	2019	20

Average Fuel Consumption on ISO 8178 Cycle, Mode E3 : 42.2 gal/h, 159.7 l/h

S12R-Y4MPTAW-3

TIER 4

1260 HP @ 1600rpm



LOUISIANA
74257 Hwy 25
Covington, LA 70435
985.892.0107

TEXAS
905 W 13th St.
Deer Park, TX 77536
281.247.8925

KENTUCKY
3885 Industrial Dr.
Paducah, KY 42001
270.845.3680



labordeproducts.com

S12R-Y4MPTAW-3

S12R-Y4MPTAW-3

TIER 4

1260 HP @ 1600rpm

Load	Speed [rpm]	Output [hp]	Torque [lb.ft]	Fuel Consumption [gal/h]
100%	1600	1260	4138	63
83%	1500	1041	3646	50
67%	1400	848	3181	40
53%	1300	671	2709	31
43%	1200	536	2348	25
34%	1100	423	2019	20

Average Fuel Consumption on ISO 8178 Cycle, Mode E3 : 42.2 gal/h, 159.7 l/h



LOUISIANA
74257 Hwy 25
Covington, LA 70435
985.892.0107

TEXAS
905 W 13th St.
Deer Park, TX 77536
281.247.8925

KENTUCKY
3885 Industrial Dr.
Paducah, KY 42001
270.845.3680



labordeproducts.com